


Modeller	ED3004 - ED3007 ED3030 - ED3100	ED4100/50-G230	HDF120 - HDF180 HDF220	CDV/230V	CDV/50BAR
Boşaltma Tipi	Hava Kayıpsız, Elektronik Seviye Sensörlü	Hava Kayıpsız, Elektronik Seviye Sensörlü	Hava Kayıpsız, Mekanik Şamandıralı	Zaman Röleli	Zaman Röleli
Çalışma Basıncı	16 bar	50 bar	16 bar	16 bar	50 BAR
Hava Debileri	4 - 7 - 30 - 100 m ³ /dk	100 m ³ /dk	90 - 100 - 250 m ³ /dk	150 m ³ /dk	150 m ³ /dk
Bağlantı Çapları	Giriş- 2 x G 1/2" Çıkış- G 3/8"	Giriş- 2 x G 1/2" Çıkış- G 3/8"	Giriş- G 1/2" & 1" Çıkış- G 1/2"	Giriş- 2 x G 1/2" Çıkış- G 3/8"	Giriş- G 1/2", Çıkış- G 3/8"
Elektrik Bağlantısı	230V, 115V, 24V, 24V DC	230V, 115V, 24V, 24V DC	Yok	230V, 115V, 24V	
Ölçüler (UxGxY)	0,6 kg, 139x67x111 mm 1,0 kg, 156x67x122 mm 1,1 kg, 156x67x137 mm 1,5 kg, 156x67x197 mm	1,9 kg, 178 x 87 x 115 mm	0,9kg,111 x 156 x 108 mm 0,9kg,111 x 156 x 108 mm 1,9kg,111 x 256 x 108 mm	0,7 kg, 90 x 90 x 110 mm	


Parker Kondens Tahliye Cihazı Teknolojileri



Operation

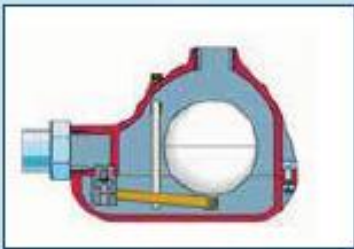


With no water in the drain the valve is closed - no air loss.

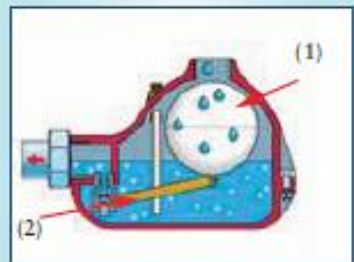

The rising water level forces the float (1) to rise and open the valve (2). The water is allowed to exit without any air loss.



As the water exits the float drops. The valve re-closes before any air can escape.

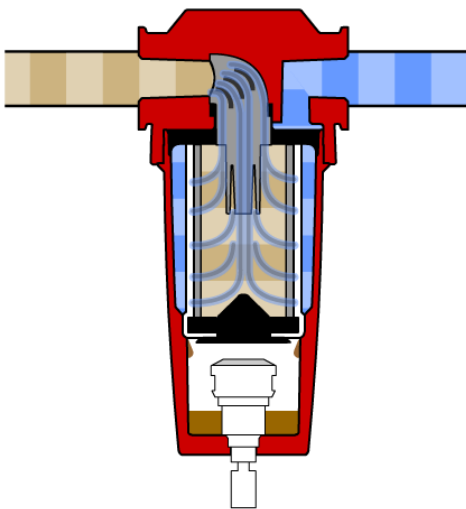

Parker | Hiross

